


The lightfast coating system

# REMACOAT FDA

**REMACOAT** is a two-component, solvent free polyurea coating system. Its main features are outstanding processing characteristics such as rapid curing, even at temperatures below 0°C (32°F) and high moisture resistance.

## Application areas

**REMACOAT FDA** has been tested according to EC Directive 2002/72/EC and the Consumer Goods Regulations for foodstuffs and given approval release for use in contact with dry foods.

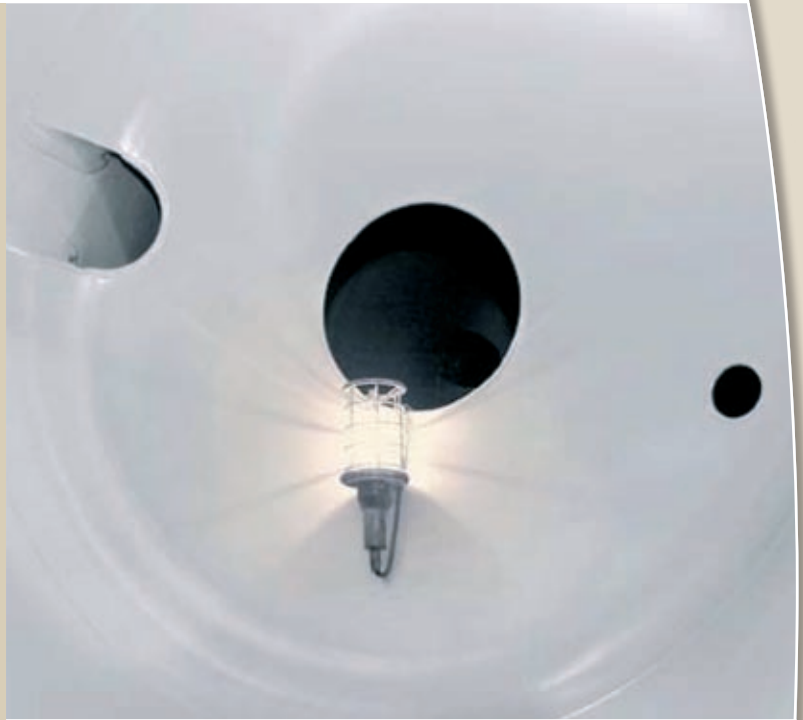

Inside tank lining



Tank preparation

## Typical fields of use

- Food industry
- Cold-storage rooms
- Low-temperature rooms
- Agricultural industry

## Advantages

- High elasticity
- High tear propagation resistance
- Rapid application due to short gel times
- Reduced plant/component downtime
- Good aging and weathering resistance
- Resistant to hydrolysis

The lightfast coating system

# REMACOAT FDA



## Product properties

<b>Product characteristics</b>	<ul style="list-style-type: none"><li>• Highly reactive, fast-curing, two-component polyurea (polycarbamide) coating system</li><li>• Solvent free, 0 % V.O.C.</li></ul>
<b>Storage stability</b>	<ul style="list-style-type: none"><li>• Max. 12 months</li><li>• Direct exposure to sunlight or heat should be avoided</li></ul> The DIN-Regulation 7716 must be observed!

## Technical data

<b>Specific weight</b>	DIN EN ISO 1183	1.00 ± 0.02 g/m <sup>3</sup>
<b>Tensile strength</b>	ISO 37-2005 (DIN 53504)	≥ 15 N/mm <sup>2</sup>
<b>Elongation at break</b>	ISO 37-2005 (DIN 53504)	≥ 100 %
<b>Modulus 300</b>	ISO 37-2005 (DIN 53504)	≥ 8 N/mm <sup>2</sup>
<b>Hardness</b>	ISO 868-2003 (DIN 53505)	50 ± 5 Shore D
<b>Abrasion</b>	DIN ISO 4649-2006	≤ 300 mm <sup>3</sup>
<b>Resilience elasticity</b>	ISO 4462-1986 (DIN 53512)	≥ 35 %
<b>Tear growth resistance</b>	ISO 34-1-2004-Method A	≥ 20 N/mm

Full physical properties are reached after 5-7 days. The technological values indicated were determined after a 28-day conditioning at ambient temperature (T = 23 ± 2 °C; air humidity = 40-60 %).

<b>Available container sizes</b>	<b>REMACOAT FDA Poly*</b>	20 kg / 192 kg containers
	<b>REMACOAT FDA Iso</b>	20 kg / 224 kg containers

\* IMPORTANT NOTE: The poly-components must be very thoroughly agitated prior to use!

The high reactivity of the systems makes it necessary for **REMACOAT coating systems** to be processed exclusively with special two-component high-pressure airless injection machines. These units are available through our worldwide sales and service network.

REMA TIP TOP GmbH  
Business Unit Industrie

Gruber Strasse 63  
Phone:  
Fax:  
www.rema-tiptop.com

85586 Poing/Germany  
+49 81 21 707 - 245  
+49 81 21 707 - 222  
info@tiptop.de

Your local contact:

582 1291 - IV.08 Printed in Germany

